# This Page Is Inserted by IFW Operations and is not a part of the Official Record

# **BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

## IMAGES ARE BEST AVAILABLE COPY.

As rescanning documents will not correct images, please do not report the images to the Image Problem Mailbox.

THIS PAGE BLANK (USPTO)

## WORLD INTELLECTUAL PROPERTY ORGANIZATION International Bureau



( , , ,	(51) International Patent Classification 6:		(11) International Publication Number: WO 95/12619
C08B 31/18, 15/02, 37/00		A1	(43) International Publication Date: 11 May 1995 (11.05.95
(21) International Appl			CN, CZ, DE, DK, EE, ES, FI, GB, GE, HU, JP, KE, KG
(22) International Filing Date: 4 November 1994 (04.11.94)			NL, NO, NZ, PL, PT, RO, RU, SD, SE, SI, SK, TJ, TI
(30) Priority Data: 9301905	4 November 1993 (04.11.93)	) N	UA, US, UZ, VN, European patent (AT, BE, CH, DE, DK ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAP patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE

- (71) Applicant (for all designated States except US): INSTITUUT VOOR AGROTECHNOLOGISCH ONDERZOEK (ATO-DLO) [NL/NL]; P.O. Box 17, NL-6700 AA Wageningen (NL).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): VEELAERT, Sarah [BE/BE]; Thonetlaan 8, B-2050 Antwerp (BE). DE WIT, Dirk [NL/NL]; Halderweg 64, NL-6721 ZK Bennekom (NL). TOURNOIS, Huibert [NL/NL]; Jan van Arkelweg 20, NL-3911 CD Rhenen (NL).
- (74) Agent: DE BRUIJN, Leendert C.; Nederlandsch Octrooibureau, Scheveningseweg 82, P.O. Box 29720, NL-2502 LS The Hague (NL).

SN, TD, TG), ARIPO patent (KE, MW, SD, SZ).

#### Published

With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.

- (54) Title: METHOD FOR THE OXIDATION OF CARBOHYDRATES
- (57) Abstract

The invention provides a method for the oxidation of carbohydrates with periodate in an aqueous medium, with which method a less than equivalent amount (for example 10 mol.%) of periodate is used and the periodate is regenerated during the reaction in a separate reaction chamber. The periodate is preferably regenerated electrochemically. The oxidation leads to dialdehyde carbohydrates in which advantageously 30-85 % of the available groups are oxidised to dialdehyde groups.

## FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

	Austria	GB	The de Winsdom	MR	Mauritania
AT			United Kingdom		
AU	Australia	GE	Georgia	MW	Malawi
BB	Barbados	GN	Guinea	NE	Niger
BE	Belgium	GR	Greece	NL	Netherlands
BF	Burkina Faso	HU	Hungary	NO	Norway
BG	Bulgaria	IE	Ireland	NZ	New Zealand
BJ	Benin	IT	Italy	PL	Poland
BR	Brazil	JP	Japan	PT	Portugal
BY	Belarus	KE	Kenya	RO	Romania
CA	Canada	KG	Kyrgystan	RU	Russian Federation
CF	Central African Republic	KP	Democratic People's Republic	SD	Sudan
CG	Congo		of Korea	SE	Sweden
CH	Switzerland	KR	Republic of Korea	SI	Slovenia
CI	Côte d'Ivoire	KZ	Kazakhstan	SK	Slovakia .
CM	Cameroon	Li	Liechtenstein	SN	Senegal .
CN	China	LK	Sri Lanka	TD	Chad
CS	Czechoslovakia	LU	Luxembourg	TG	Togo
CZ	Czech Republic	LV	Latvia	TJ	Tajikistan
DE	Germany	MC	Monaco	TT	Trinidad and Tobago
DK	Denmark	MD	Republic of Moldova	UA	Ukraine
ES	Spain	MG	Madagascar	US	United States of America
FI	Finland	ML.	Mali	UZ	Uzbekistan
FR	France	MN	Mongolia	VN	Viet Nam
GA	Cohon		-		

15

20

25

35

#### Method for the oxidation of carbohydrates

The invention relates to a method for the oxidation of carbohydrates which possess two adjacent secondary alcohol functional groups, wherein a less than equivalent amount of periodate is used and the periodate is regenerated during the reaction.

The oxidation of carbohydrates of this type can lead to dialdehyde carbohydrates. The reactive aldehyde groups render dialdehyde compounds of this type suitable for many applications, for example as cross-linking agents for naturally occurring and synthetic polymers, mainly with the aim of an improvement in the sensitivity to moisture and the production of insoluble films and fibres. Thus, dialdehyde starch is used in the paper, leather and textile industry. It is also usable as an additive in glue, binding agents, coatings, photographic material, thickeners, cosmetics, plastics and the like. An application developed recently is that of carrier material for proteins, for example for use in diagnostics. Cationic dialdehyde starch is also used for the application in paper, in connection with the interaction of the positive (ammonium) groups with the negatively charged cellulose. Furthermore, dicarboxylic acid carbohydrates, which are suitable, inter alia, as calcium-complexing agents (substitutes for phosphate) can be obtained from dialdehyde carbohydrates by further oxidation.

It is known that carbohydrates can be oxidised to dialdehyde carbohydrates using periodic acid or periodate salts, lead(IV) salts or permanganate; the oxidation of inulin with periodate is described, for example, by Maekawa and Nakajima, J. Agr. Chem. Soc. Japan 28, 357-363 (1954) (see Chem. Abs. 10078c (1954)).

The oxidation of carbohydrates with periodate can be represented by the following equation, in which A denotes the residue of a monosaccharide unit of the carbohydrate.

30 A A 
$$+ 10_4^-$$
 - A  $+ 10_3^- + H_2O$  CHO CHO

Instead of the metaperiodate  $IO_4^-$  shown in the equation, usually in the form of  $H_4IO_6^-$ , and periodic acid,  $H_5IO_6$ , the oxidising ion can also be paraperiodate  $H_2IO_6^{3-}$ .

10

15

20

25

30

35

US Patent 2.648,629 describes a method for the oxidation of poly-saccharides by treatment with a catalytic amount (about 0.3 equivalent) of (per)iodic acid, wherein the iodic acid formed is continuously regenerated to periodic acid by means of an electric current passing through the cell which also contains the polysaccharide. Thus, both the oxidation of the polysaccharide and the regeneration of periodate occur in the same reaction chamber, i.e. the anode chamber. The dialdehyde content of the oxidised polysaccharide (starch) is 68-89%. This method is associated with contamination of both the polysaccharide by electrode metal and the electrode by organic material resulting in corrosion of the electrode coating.

US 3.703,508 teaches a method for regenerating spent periodate resulting form the oxidation of polysaccharides, wherein the aqueous liquor containing the spent periodate is separated form the oxidised polysaccharide product, regenerated in a multi-chamber electrodialysis apparatus and then reused for oxidising a next batch of polysaccharide. A disadvantage of this method is a high (equimolar) consumption of expensive periodate, which becomes very diluted after washing.

A method for the oxidation of starch using an excess of periodate, followed by separation of the reaction product and chemical regeneration of spent periodate using chlorine, was described by McGuire and Mehltretter in Die Stärke 23, 42-45 (1971). The dialdehyde content of the oxidised starch is 97%. This method leads to at least equivalent amounts of salts in the end product, which presents separation problems and/or restricts the possible uses of the products.

DD-A-87778 describes a method for the production of water-soluble dialdehyde polysaccharides using electrochemically generated periodate. The water-soluble polysaccharide (dextran) is oxidised with 0.2 equivalent of periodate in order to produce a product having a degree of oxidation of 10%; the reaction mixture is contacted with an ion exchange resin in acetate form in order to separate the product from the (per)-iodate, and the resin is eluted with alkali and the recovered (per)iodate is purified and freed from acetate (resin product) and formate (reaction byproduct) by evaporation and then regenerated and reused. This method can only be used in case of water-soluble materials. The process cannot be performed continuously and at least an equimolar amount of periodate corresponding to the degree of oxidation has to be applied.

15

20

25

30

35

Thus, the known methods for the oxidation of carbohydrates to give diald hyde carbohydrates, including that using periodate, all have disadvantages; said methods are associated with a high consumption of periodate or with high salt production or with contamination of the electrode or with restricted applicability or with long reaction times. Where regeneration of the spent periodate has already been considered, the methods proposed for this purpose are not very effective and, as a consequence of contamination by electrode metal, are unsatisfactory and expensive.

A method has now been found for the oxidation of carbohydrates with periodate in an aqueous medium which has a lower consumption of periodate per dialdehyde functional group formed, with which method, moreover, smaller amounts of salt are formed; the reaction times are also appreciably shorter.

The method according to the invention, wherein a less than equivalent amount of periodate is used and the periodate is regenerated during the reaction, is characterised in that the periodate is regenerated in a separate reaction chamber.

It has been found that in the oxidation of carbohydrates with periodate the reaction proceeds relatively rapidly at a low degree of conversion and is appreciably retarded at a high degree of conversion, that is to say when approximately half of the available glycol groups (groups of two adjacent secondary alcohol functional groups) have been converted to dialdehyde groups. On closer study, the reaction between carbohydrate and periodate is found to be a second order reaction at the start, which means that the rate of reaction is directly dependent on both the carbohydrate concentration and the periodate concentration. When an appreciable proportion, of the order of 50%, of the carbohydrate has been converted, the rate of reaction has become slower than may be anticipated on the basis of second order kinetics. Whereas a conversion of few tens of per cent is obtained in minutes, or at most a few hours, high degrees of conversion of, for example, more than 85%, require extremely long reaction times, of the order of many days.

Furthermore, it has been found that some properties of dialdehyde carbohydrates, such as the complexing properties and the reactivity, are no poorer when the percentage of dialdehyde groups is of the order of, for example, 50% instead of, for example, 90% of the theoretical maximum. It is assumed that (hemi-)acetal formation between a primary hydroxyl

WO 95/12619 PCT/NL94/00272

group and one or two aldehyde groups in a substantially oxidised carbohydrate plays a role h re. Other prop rties, such as solubility in water, water absorption and biodegradability, are even found to be better in less completely oxidised carbohydrates. Moreover, recovery of iodate out of the reaction mixture during washing is easier in case of intermediate degrees of oxidation, such as from 40 to 60%.

Best results, both in respect of material consumption and reaction time and in respect of properties of the product of the method according to the invention, are obtained when the oxidation of the carbohydrate is continued until 0.05 to 0.85, especially 0.2 or even 0.3 to 0.85, in particular 0.3-0.65, more in particular 0.4 to 0.65, dialdehyde groups have been formed per original monosaccharide unit, that is to say with e.g. a degree of oxidation of 30-85% or 40-65%.

A less than equivalent amount of periodate is understood to be an amount of less than 1 mol periodate per monosaccharide unit. In particular, less than 0.75 mol periodate per monosaccharide unit, and preferably 0.02-0.5 and with particular preference 0.05-0.25 mol periodate per monosaccharide unit is used. With such low periodate/carbohydrate ratios the recovery of periodate after the reaction is simpler and less expensive (fewer washing steps) and relatively high carbohydrate concentrations can be used with, consequently, fewer undesirable side reactions. As a result of the simultaneous regeneration, a reasonable rate of reaction can be maintained despite the retardation of the oxidation towards the end of the reaction.

Suitable carbohydrates that can be oxidised to dialdehyde carbohydrates using the method according to the invention are, in principle, all disaccharides, oligosaccharides and polysaccharides which possess a glycol functional group, that is to say a vicinal dihydroxyl group, at least in one monosaccharide unit, but preferably in the majority of the monosaccharide units. Examples are glucans such as starch (mainly  $\alpha$ -1.4 bonds), cellulose (mainly  $\beta$ -1.4 bonds), glycogen and dextran (mainly  $\alpha$ -1.6 bonds), fructans such as inulin (mainly  $\beta$ -2.1 bonds) and levan (mainly 2.6 bonds), cell wall polysaccharides such as mannans, galactans, xylans and arabans, other pentosans, chitins as naturally occurring in crustaceae, fungi and green algae, pectic acid and pectins, and other gums and the like. Also useful are naturally occurring and synthetic analogues, fractions and derivatives thereof, including starch fraction such as amylose ( $\alpha$ -1.4 glucan) and amylopectin ( $\alpha$ -1.4 and  $\alpha$ -1.6 glucan),

10

15

20

25

30

35

dextrins, cyclodextrin, but also sucrose, lactose and maltose. Suitable carbohydrates also include oxidised carbohydrates, for example carbohydrates in which some of the primary hydroxyl groups have been replaced, for example by carboxylic acid groups or by ammonium groups, either as natural products or as products from (bio)chemical oxidation of carbohydrates.

The invention also relates to an oxidised carbohydrate obtainable by the method described herein having a content of 0.05-0.85 dialdehyde functional groups per original monosaccharide unit, in particular if the carbohydrate is an  $\beta$ -1,4-glucan such as cellulose or a pentosan, such as inulin, xylan, levan. A content of 0.05-0.65 dialdehyde functional groups per original monosaccharide unit is preferred in case of  $\alpha$ -1,4-glucans, such as starch, and 0.2-0.85 dialdehyde functional groups per original monosaccharide unit in case of other carbohydrates such as dextrans. Most preferred are carbohydrates having an oxidation degree of 30-65%, i.e. a dialdehyde content of 0.3-0.65 per original monosaccharide unit.

The regeneration of the spent periodate, that is to say iodate and possible other oxidation states of iodine, such as iodide, obtained on oxidation thereof, takes place simultaneously with the oxidation reaction. Said regeneration can proceed by chemical means, for example using chlorine or hypochlorite, but is preferably carried out electrochemically.

Preferably, the regeneration is carried out in a chamber (cell) which is separate from the reaction chamber. A suitable electrolysis cell is known per se and consists of two compartments separated by a cation exchange membrane (e.g. Nafion® from Dupont, Neosepta® from Tokuyama Soda, Flemion® from Asahi Glass, Ionics® from Ionics Inc.). The anode material may be electrochemically deposited lead dioxide on inert material such as platinum, carbon, titanium or titanium oxide, or lead particles embedded in a polymer matrix. The cathode material can be platinum or stainless steel. Other electrode materials are equally usable. Usually a current density of 1.5-3 A/dm² is applied. The corresponding anode potential measured against a Ag/AgCl reference electrode is 1.7-1.8 V.

A filter or membrane is placed between the reaction chamber and the electrochemical cell, which filter or membrane is essentially permeable to the ionic compounds and impermeable to the carbohydrate. The materials for a membrane of this type are chosen depending on the carbo-

10

15

20

25

30

35

hydrate, in particular the chain length thereof. Suitable materials for use with long-chain carbohydrates such as starch and inulin are, for example, poly(vinylidene fluoride), polyacryl nitrile and polysulfone.

It was found that a further improvement can be achieved by interposing, between the polysaccharide oxidation stage and the periodate regeneration stage, a stage wherein the solution to be regenerated containing periodate and iodate is subjected to electrodialysis.

In the electrodialysis cell a number of cation and anion exchange membranes are placed in an alternating pattern between a cathode and anode. For example Nafion® can be used as a cation exchange membrane and Tosflex® (from Tosoh) as an anion exchange membrane. The filtered solution from the oxidation reactor is fed to each electrodialysis compartment. Since only ions can migrate through the membrane, the ionic concentration will increase in alternating compartments, while neutral compounds like carbohydrates will remain in the diluate. The anions present in the concentrate are mainly iodate, periodate and formate. If the concentrate passes the positively charged electrode (anode potential e.g. 1.2 V), formate will be oxidised to carbon dioxide. Hence, the concentrate leaving the electrodialysis cell will be purified from formate. This is advantageous because formic acid, which is usually formed as a byproduct of the polysaccharide oxidation, was found to attack the lead dioxide anode used in the periodate regeneration cell. Consequently, iodate in the concentrate can be oxidized to periodate in the electrochemical cell at a lead dioxide electrode without interfering formate. Both diluent from the electrodialysis cell and regenerated concentrate from the electrochemical regeneration cell are recombined and pumped to the oxidation vessel. The combined process of iodate and periodate concentration, purification and regeneration can be performed simultaneously during polysaccharide oxidation.

When a batch of carbohydrate has been oxidised to the desired degree of oxidation, the reaction can be stopped by changing the feed of the electrodialysis cell. The oxidation liquor is pumped through the diluate chambers of the electrodialysis cell, and the regeneration solution is pumped through the concentrate cell, without recombination of the diluate and concentrate. This results in a decrease of the periodate/iodate concentration in the oxidation reactor, which can be compared with filtration and washing. The regeneration liquor is concentrated and purified from formate, while the iodate therein is

15

20

25

30

35

oxidised to periodate.

#### Description of the figures

Figure 1 represents an embodiment according to the invention wherein the oxidation reactor 1 is connected through line 2 and filter 3, which is substantially impermeable for carbohydrates, with regeneration cell 4, comprising a lead dioxide anode 5, a cation exchange membrane 6 and a cathode 7 and with return line 8. The catholyte may be recycled through line 9.

Figure 2 represents another embodiment of the invention which, in addition to the parts described under Figure 1, comprises an electrodialysis cell 10 comprising an anode 11, one or more anion exchange membranes 12, one or more cation exchange membranes 13 and a cathode 14. In this figure, the four membranes enclose a diluate compartment, a concentrate compartment and a diluate compartment. Line 15 connects the concentrate compartment(s) of cell 10 with the regeneration cell 4, and lines 16 connects the diluate compartments of cell 10 to reactor 1. Line 8 returns the regenerate of cell 4 to the reactor 1.

Figure 3 represents a similar embodiment as figure 2, with the difference that the regenerate of cell 4 is fed through line 17 to the concentrate compartment of cell 10. This mode can be used when the oxidation is completed and the carbohydrate batches are exchanged.

Figure 4 shows the water absorption capacity of oxidised starch as a function of the degree of oxidation.

#### Example 1

Semi-continuous preparation of dialdehyde starch; oxidation and regeneration

Potato starch (Avebe, 162 g, 1 mol) is suspended in 1.6 l water and introduced into a 2.5 l reaction vessel. 21.4 g (0.1 mol) sodium metaperiodate (Merck) are added to the suspension. The solution obtained from the suspension is pumped into an electrolysis vessel via a membrane (polyacrylonitrile) which is impermeable to starch. The electrolysis vessel contains an anode plate consisting of a lead dioxide layer on titanium and a stainless steel cathode separated by a perfluorosulphonic acid cation exchanger (Nafior®) as separating membrane between anode space and cathode space. The electrodes, the membrane and turbulence promoters are assembled in a common framework. The catholyte solution (5%

10

15

25

30

35

NaOH) is circulated through the catholyte chamber. The cell is operated at a current density of 2 A/dm<sup>2</sup>. The regenerated periodate solution is continuously pumped back to the reaction vessel. At a current yield of 70%, a pH of 3 to 5 and a temperature of 25°C, a degree of oxidation (dialdehyde starch) of 50% is obtained after about half an hour, a degree of oxidation of 65% is obtained within one hour and a degree of oxidation of 95% is obtained after about 10 hours.

The degree of oxidation is determined by stopping the periodate reaction in a reaction sample and reducing the oxidation product by treatment with 0.8 M sodium borohydride in 0.1 M sodium hydroxide solution, followed by hydrolysis with sulphuric acid at elevated temperature. As a result of this treatment, oxidised anhydroglucose units yield erythritol and non-oxidised anhydroglucose units yield glucose, which products are determined quantitatively by means of HPLC.

The biodegradability of dialdehyde starch having a degree of oxidation of 50% obtained by this method has been determined. The rate of disappearance, determined using a modified Sturm test (ASTM D5209) and a two-phase (air/water) BOD test (NEN 6516) is twice as high as that of 100% dialdehyde starch.

#### 20 Example 2

Semi-continuous preparation of dialdehyde starch: oxidation, electrodialysis and regeneration.

The same procedure as described in example 1 is followed, with the exception that the oxidant solution is purified and concentrated in an electrodialysis unit prior to regeneration. The electrodialysis cell consists of a series of anion and cation exchange membrane pairs (Ionics®). All chambers are supplied with the same aqueous liquor from the oxidation reactor after filtration. Electrodialysis is performed at a current density of 1 A/dm². The concentrate is two times more concentrated than the feed solution. The concentrate is pumped to the regeneration cell where iodate is oxidised to periodate with a current density of 2.5 A/dm². At a current yield of 80% a degree of oxidation of 60% is obtained after half an hour. The dialdehyde starch solution is purified from iodic compounds by changing the feed solutions of the electrodialysis cell. When electrodialysis is stopped, 90% of the iodic compounds in the periodate form, are recovered form the oxidation solution in the regeneration solution.


#### Example 3


Three grams of dialdehyde starch and 25 ml deionised water (pH 4) were weighed in a plastic recipient. The suspension was stirred for 30 minutes and subsequently centrifuged. The supernatant was separated and the residue weighed. The water absorption was calculated as the mass of water absorbed over the initial mass of dry material. The results as a function of the degree of oxidation are represented in figure 4. The absorbed water content varied from 1.2 to 1.4 g water per g dry starch with a maximum at 40 to 50% oxidation.


#### Claims

- 1. Method for the oxidation of carbohydrates with periodate in an aqueous medium, wherein a less than equivalent amount of periodate is used and the periodate is regenerated during the reaction, characterised in that the periodate is regenerated in a separate reaction chamber.
  - 2. Method according to Claim 1, wherein the chamber in which the periodate is regenerated is separated by means of semi-permeable wall from the chamber in which the carbohydrate is oxidised.
- 3. Method according to Claim 1 or 2, wherein the periodate is regenerated electrochemically.
  - 4. Method according to Claim 3, wherein, before the periodate is regenerated, the solution containing periodate reaction products is subjected to electrodialysis.
- 5. Method according to one of Claims 1-4, wherein 0.05-0.25 mol periodate is used per mole of monosaccharide unit.
  - 6. Method according to one of Claims 1-5, wherein the carbohydrate is oxidised to a content of 0.05-0.85 dialdehyde functional groups per original monosaccharide unit.
- 7. Method according to Claim 6, wherein the carbohydrate is oxidised to a content of 0.2-0.85, preferably 0.3-0.65 dialdehyde functional groups per original monosaccharide unit.
  - 8. Method according to one of Claims 1-7, wherein the carbohydrate is a fructan, or a glucan with a majority of  $\beta$ -1,4 bonds.
- 9. Method according to Claim 6, wherein the carbohydrate is a glucan with a majority of α-1,4 bonds, and is oxidised to a content of 0.05-0.65, preferably 0.3-0.65 dialdehyde functional groups per original monosaccharide unit.
  - 10. Oxidised carbohydrate obtainable using the method according to any one of Claims 7-9.

WO 95/12619 PCT/NL94/00272

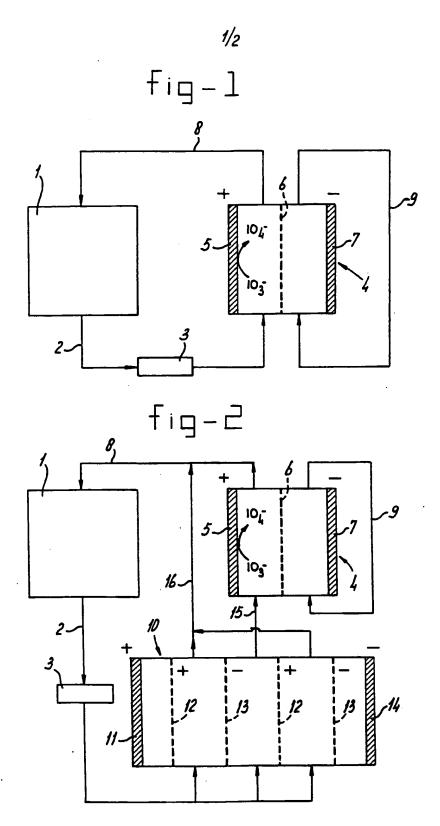

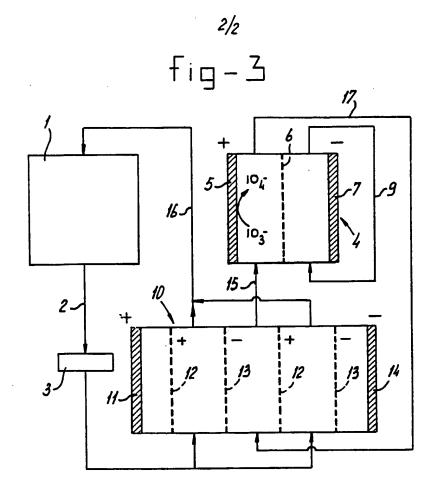

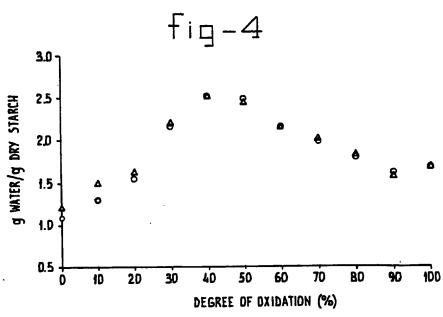

#### INTERNATIONAL SEARCH REPORT

Intm. .onal Application No PCT/NL 94/00272

A. CLASSIFICATION OF SUBJECT MATTER
IPC 6 C08B31/18 C08B15/02 C08B37/00 According to International Patent Classification (IPC) or to both national classification and IPC **B. FIELDS SEARCHED** Minimum documentation searched (classification system followed by classification symbols) CO8B IPC 6 Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched Electronic data base consulted during the international search (name of data base and, where practical, search terms used) C. DOCUMENTS CONSIDERED TO BE RELEVANT Relevant to claim No. Citation of document, with indication, where appropriate, of the relevant passages US,A,2 648 629 (DVONCH ET AL.) 11 August 1-10 1953 cited in the application see column 1, line 30 - line 55 see column 2, line 9 - line 13 see examples 1-2 Y US,A,3 703 508 (A. H. HEIT ET AL.) 21 1-10 November 1972 cited in the application see abstract; claims STARKE., ٨ vol.23, no.2, 1971, WEINHEIM DE pages 42 - 45 T. A. MCGUIRE ET AL. 'Chemical process for making dialdehyde starch' cited in the application -/--X Further documents are listed in the continuation of box C. X Patent family members are listed in annex. Special categories of cited documents: T later document published after the international filing date or priority date and not in conflict with the application bu-cited to understand the principle or theory underlying the \*A\* document defining the general state of the art which is not considered to be of particular relevance invention "E" earlier document but published on or after the international "X" document of particular relevance; the daimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "Y" document of particular relevance; the claimed invention cannot be comidered to involve an inventive step when the document is combined with one or more other such document, such combination being obvious to a person skilled in the art. "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed "&" document member of the same patent family Date of mailing of the international search report Date of the actual completion of the international search 13.03.95 3 March 1995 Name and mailing address of the ISA Authorized officer Birropean Patent Office, P.B. 5818 Patentiaan 2 NL. 2220 HV Rijswijk Tel. (+31-70) 340-2000, Tx. 31 651 epo nl, Parc (+31-70) 340-3016 Mazet, J-F

Form PCT/ISA/218 (second sheet) (July 1992)

1

## INTERNATIONAL SEARCH REPORT

Intra-uonal Application No
PCT/NL 94/00272

gory *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.	
	DD,A,87 778 (LANGHAMMER) 1972 cited in the application see the whole document	1,3,10	
		·	

Porm PCT/ISA/218 (continuation of second sheet) (July 1992)

1

## INTERNATIONAL SEARCH REPORT

Information on patent family members

Inte. \_onal Application No PCT/NL 94/00272

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US-A-2648629	11-08-53	NONE	
US-A-3703508	21-11-72	US-A- 366	07694 11-05-71 63417 16-05-72 81213 01-08-72
DD-A-87778	1 <b></b>	NONE	,

Porm PCT/ISA/210 (petent family annex) (July 1992)

THIS PAGE BLANK (USPTO)